


EUROLITE LED PAR-set ECO w/ stand

Art. No.: 09009918

GTIN:



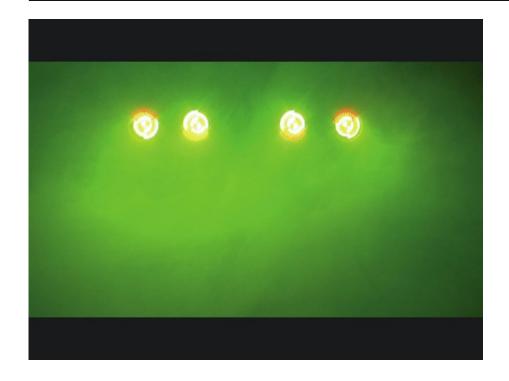







The article is no longer in our assortment.

Features: Logistic

EUROLITE A1 Steel Lighting Stand

Low-priced steel-stand with crossbeam, max. load 14 kg, max. height 250 cm

- Stable lighting stand for mobile use
- The telescopic tube is additionally fixed with a safety pin
- TV spigot
- Adjustable height

EUROLITE LED PAR-56 RGB 10mm Short black

LED PAR-56 Profi Spot, short

- DMX512 control via regular DMX controller (occupies 5 channels)
- Sound-control via built-in microphone
- Color-change speed and strobe effect adjustable via DIP switches
- Locking possibility at the mounting bracket
- For illuminating e.g. mirror balls, entrance or counter areas or as basic illumination
- Perfect in public places, main halls, stages, lounges
- Multi-color color-changes
- Master/Slave function
- Advantages of LED technology: long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation
- Available in silver or in black
- Preprogrammed in Light'J

OMNITRONIC XLR cable 3pin 1.5m bk

Audio cable with 3-pin XLR connectorsPackage contents

EUROLITE DMX LED Operator 1 controller

Compact DMX controller for easy application

- 5 control channels only suitable for special LED-spots (RGB and TCL)
- Select color mode for choosing single colors
- Internal programs
- Auto mode for running all programs
- Sound-control via built-in microphone
- Pause function
- Blackout function
- Control LEDs display current operating mode
- Program Select-fader for selecting the internal programs
- Speed-fader for adjusting the program-speed
- Strobe-effect with adjustable speed
- Designed for standing operation, optional installation is customer's choice
- Power supply via enclosed 12 V DC power unit
- Can transmit up to 5 DMX channels
- Control via DMX
- Desktop console housing

Technical specifications:

| Weight: | 14,44 kg |
|----------------------|----------------------------------------------|
| Legal specifications | |
| Special product: | Not designed for household room illumination |
| Intended use: | Show effect lighting |

EUROLITE A1 Steel Lighting Stand

| Maximum carrying capacity: | 14 kg |
|----------------------------|-----------------------|
| Height: | Maximum: 250 cm |
| | Minimum: 120 cm |
| Attachment system: | TV spigot mini Ø 17mm |
| Type (general stands): | Light stand/manual |
| Color: | Black |
| Weight: | 5,40 kg |

EUROLITE LED PAR-56 RGB 10mm Short black

| 230 V AC, 50 Hz |
|-----------------|
| 16,00 W |
| 5 |
| Light´J |
| Width: 24 cm |
| Depth: 23,5 cm |
| Height: 18,5 cm |
| 1,85 kg |
| 108 |
| |

| Beam angle: | 25-30° |
|------------------------|----------------------------------------------|
| Light ouput intensity: | R 18 Lm; G 187.2 Lm; B 28.8 Lm |
| Dimensions: | 240 x 235 x 185 mm |
| Legal specifications | |
| Special product: | Not designed for household room illumination |
| Intended use: | Show effect lighting |

OMNITRONIC XLR cable 3pin 1.5m bk

| Cable construction: | 2 x 0,22 mm ² Microphone cable |
|---------------------|-------------------------------------------|
| Cable length: | 1,5 m |
| Plug A: | 1 x 3-pin XLR (M) |
| Plug B: | 1 x 3-pin XLR (F) |
| Material: | Metal |
| Color: | Black |
| Dimensions: | Diameter: Ø 6 mm |
| Weight: | 120 g |

EUROLITE DMX LED Operator 1 controller

| IP20 |
|---------------------------------------------------------|
| IF20 |
| Output 5 |
| DMX |
| Black |
| Black |
| Desktop console housing |
| Width: 22 cm |
| Depth: 14,5 cm |
| Height: 6,5 cm |
| 920 g |
| 230 V AC, 50 Hz, |
| via 12 V DC, 300 mA power unit included in the delivery |
| 5 |
| via built-in microphone |
| 3-pin XLR connector |
| 220 x 145 x 65 mm |
| |