


OMNITRONIC PAS-215A MK4 2-way Top, active, DSP, BT

Active speaker with 15" woofer, 1" driver, 400 W RMS LF, 50 W RMS HF

Art. No.: 11039557

GTIN: 4026397739305

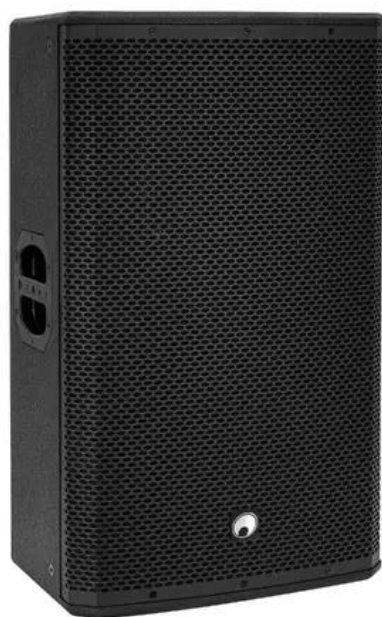

List price: 653.31 €

incl. 19% VAT.

Features:

- Active PA speaker system for touring applications and permanent installations
- Optimized for combination with PAS subwoofers
- DSP-controlled biamp amplifier (class D)
- Trapezoidal, multi-functional multiplex cabinet with monitor shape
- Stereo Bluetooth link for wireless stereo operation with 2 systems linked together
- Digital signal processor
- DSP presets: MUSIC; LIVE; CLUB; VOICE
- The device is cooled by cooling fan
- Control via Bluetooth
- Bluetooth: operating range up to 10m
- Dual flange
- With rigging points
- Black metal grille with acoustic foam
- 2 Rugged carrying handles

Package contents

- 1 x compact cabinet speaker, 1 x power cord, 1 x user manual, 1 x declaration of conformity

Logistic

EAN / GTIN: 4026397739305

Weight: 25,85 kg

Length: 0.49 m

Width: 0.49 m

Height: 0.80 m

Technical specifications:

Power supply: 230 V AC, 50 Hz

Power consumption: 700 W

Protection class: Protection class I

Power connection:	Mains input via IEC connector (M) mounting version power supply cord with safety plug included
Device fuse:	5 x 20 mm, T 4 A fuse replaceable
Power:	Program: 800W LF Rated: 400W RMS LF Program: 100W HF Rated: 50W RMS HF
Frequency range:	50 - 20000 Hz
Max. SPL:	125 dB
DSP:	Digital signal processor
DSP presets:	MUSIC; LIVE; CLUB; VOICE
Dispersion angle:	90° x 60°
Cooling:	1 x cooling fan
Low cut:	100Hz, switchable
Control:	Bluetooth
Bluetooth:	With stereo link (TWS)
Bluetooth device name:	OMNITRONIC PAS-215A MK4
Range:	Bluetooth: range up to 10m
Attachment system:	Dual flange:
Flying points:	12 x M8 thread; 4 x M10 thread
Circuitry:	Class D Biamp
Control elements:	Power switch, Master control, level control per channel, Input sensitivity switch, source selector; connect, low cut switch
Controls:	Limiter; power on/off transients
Status LED:	Power, signal, peak, low cut, pairing; stereo, DSP presets
Connections:	Input: Mic-Line-Hi.Z via 2 x 3-pin XLR/6.35mm jack (F) combination socket (mounting version) Output: line via 1 x 3-pin XLR (M) mounting version
Speaker:	1 x woofer 15" with ferrit magnet Basket material: steel Conematerial: cardboard/paper Voice coil lows 3" 1 x tweeter 1" with ferrit magnet Voice coil compression tweeter highs 1,75"
Type of speaker:	Compact cabinet speaker
Type of construction:	Vented
Carrying handle:	2 pc/pcs
Material:	Plywood multi-layer glued, 15 mm, painted
Color:	Black
Dimensions:	Width: 41,5 cm Depth: 71 cm Height: 40 cm
Weight:	23,60 kg