


# CELTO IWAC210 G2 2-way Line Array Module

Line array with integrated rigging system

Art. No.: 11043700

GTIN: 4026397668230

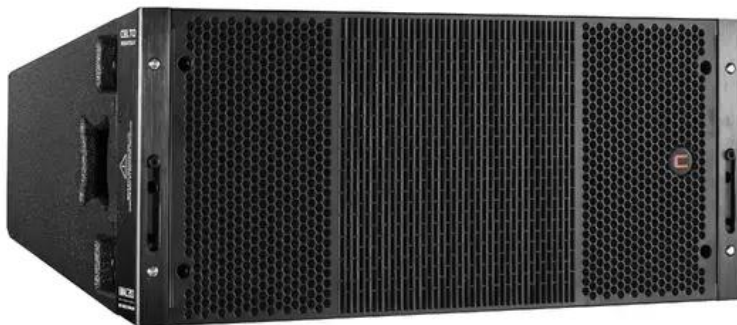

**List price: on demand €**

incl. 19% VAT.

## Features:

- Real 700 W + 110 W RMS power capacity
- For audiences with up to 30000 persons
- Up to 16 speakers per array with 10 times safety standard
- Premium custom made drivers
- Aquaplasted TC4 diaphragm for ultra smooth HF reproduction
- Proprietary isophase wave-shaping acoustic lens
- Touring-grade textured coating finish
- With QuickFly system
- Wheelboard optional
- Built with NEUTRIK connector
- CELTO ACOUSTIQUE driver
- For application areas such as: Theater; concerts/FoH's; sports centres/gyms; stage; rental

## Logistic

EAN / GTIN: 4026397668230

Weight: 34,00 kg

Length: 0.60 m

Width: 0.42 m

Height: 0.80 m

Bulky product

## Technical specifications:

|                  |                                                                                                                      |
|------------------|----------------------------------------------------------------------------------------------------------------------|
| Power:           | Peak: 2800W LF<br>Program: 1400W LF<br>Rated: 700W RMS LF<br>Peak: 440W HF<br>Program: 220W HF<br>Rated: 110W RMS HF |
| Frequency range: | 50 - 18000 Hz in full-range mode                                                                                     |
| Sensitivity:     | 99 dB (1W/1m) LF; 109 dB (1W/1m) HF                                                                                  |

|                       |                                                                                                                                                                                                                                                                                                                     |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. SPL:             | 137 dB                                                                                                                                                                                                                                                                                                              |
| Dispersion angle:     | 100° x 15° (array dependent)                                                                                                                                                                                                                                                                                        |
| Impedance:            | 8/16 ohms Biamp                                                                                                                                                                                                                                                                                                     |
| Attachment system:    | QuickFly system                                                                                                                                                                                                                                                                                                     |
| Flying points:        | With integrate rigging system                                                                                                                                                                                                                                                                                       |
| Connections:          | 2 x 4-pol SpeakON mounting version (F)                                                                                                                                                                                                                                                                              |
| Crossover frequency:  | Bi-amp mode only with external DSP processor<br>1000 Hz, 24db/oct on LF & HF<br><br>Recommended<br>Low-pass 80-120 Hz, 24db/oct with subwoofer                                                                                                                                                                      |
| Speaker:              | 2 x midrange speaker 10" with neodymium magnet<br><br>Basket material: aluminum<br>With phase plug<br>Voice coil midrange speaker 2.5"<br>1 x compression tweeter highs 1,5" with neodymium magnet<br><br>Ferrofluid voice coil compression tweeter highs 3"<br>Diaphragmmaterial: treated titanium with wave guide |
| Type of construction: | Vented                                                                                                                                                                                                                                                                                                              |
| Transport aid:        | Wheelboard optional                                                                                                                                                                                                                                                                                                 |
| Use of brands:        | Built with NEUTRIK connector<br>CELTO ACOUSTIQUE driver                                                                                                                                                                                                                                                             |
| Material:             | Baltic birch plywood, 18 mm, CNC made with tongue and grove assembly                                                                                                                                                                                                                                                |
| Color:                | Black, matte                                                                                                                                                                                                                                                                                                        |
| Dimensions:           | Width: 70 cm<br>Depth: 30.5 cm<br>Height: 46.5 cm                                                                                                                                                                                                                                                                   |
| Weight:               | 29.80 kg                                                                                                                                                                                                                                                                                                            |

**Scope of delivery:**

1 x top