


ALUTRUSS Truss Set QUADLOCK 6082 rectangle 7x4x3.5m (WxDxH)

Art. No.: 20000376 GTIN: 4026397340198





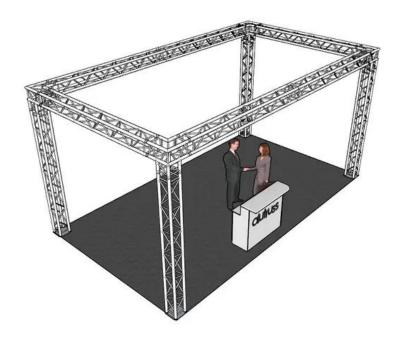





List price: 6781.81 €

incl. 19% VAT.

Features:

ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

Package contents

- 1 x connection set

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

Logistic

EAN / GTIN: 4026397340198

Package contents

- 2 x connection set

ALUTRUSS QUICK-LOCK Spare Pivot with Pin

QUICK-LOCK set

- Accessories for the robust truss system with QUICK-LOCK
- For use with TRI/QUAD system
- Trusspipe: 50 mm
- Made in Europe

Package contents

- 2 x splint, 2 x bolt

ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

Baseplate for mobile use (connectors 6082 included)

- Easy installation
- The article is delivered pre-assembled
- Trusspipe: 50 mm
- Made in Europe
- Application possibility: Standing

half cone

M10 thread

Package contents

- 1 x plate, 4 x half cone

Technical specifications:

Weight: 180,74 kg

ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

| Setup: | Easy installation |
|-----------------------------|---|
| Trusspipe: | 50 mm x 2 mm |
| Welding technique: | TIG-welding |
| Welding material: | AIMg 5 |
| Alloy: | AIMgSi1 T6 |
| Color: | Alu colored |
| Strut diameter x thickness: | 16 x 2mm |
| Dimensions: | Length: 300 cm Width: 29 cm Height: 29 cm |
| Weight: | 14,2 kg |

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

| Setup: | Easy installation | |
|-----------------------------|-------------------|--|
| Trusspipe: | 50 mm x 2 mm | |
| Color: | Alu colored | |
| Strut diameter x thickness: | 16 x 2mm | |

| Dimensions: | Length: 50 cm |
|-------------|---------------|
| | Width: 50 cm |
| | Height: 50 cm |
| Weight: | 7,95 kg |

ALUTRUSS QUICK-LOCK Spare Pivot with Pin

| Trusspipe: | 50 mm | |
|------------|-------------|--|
| Color: | Alu colored | |
| Weight: | 0,09 kg | |

ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

| Setup: | Easy installation |
|-------------|-------------------|
| Trusspipe: | 50 mm |
| Material: | Aluminum |
| Color: | Alu colored |
| Dimensions: | Length: 30,7 cm |
| | Width: 30,7 cm |
| | Height: 5 cm |
| Weight: | 1,55 kg |
| Half cone | |
| Thread: | M10 thread |