


EUROLITE AKKU Slim Tube AIR

Battery-powered effect tube with 32 pixels and AirW wireless system (2.4 GHz)

Art. No.: 41700401 GTIN: 4026397746334

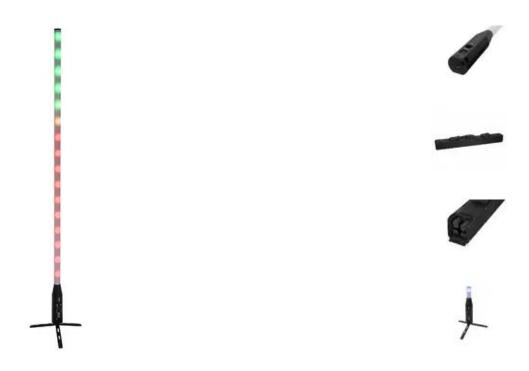

List price: 213.01 €

incl. 19% VAT.

Features:

- Integrated AirW radio transceiver for wireless master/slave operation
- Adaptive frequency hopping ensures interference-free operation in the 2.4 GHz band
- Cordless, flexible and versatile
- Battery operation up to 3,5h depending on program used
- Integrated automatic charging of the battery
- 32 powerful LEDs 0,25 W SMD 5050 3in1 TCL RGB
 LEDs controlled separately
- Frost filter
- Dimmer electronic; Energy-saving mode adjustable; color macros preset; program selection manual; color blend stepless; color selection adjustable; color fade adjustable; running light adjustable; effect speed adjustable speed; pulse effect adjustable speed
- Strobe effect
- 40 integrated show programs
- Direct color selection for 20 preset colors
- The device is cooled by passive convection cooling
- Control via stand-alone; DMX; AirW; wireless remote control (not included); master/slave function; sound to light via microphone; QuickDMX via USB (optional)
- Flicker-free
- AirW: operating range up to 70m with line-of-sight
- DMX fail mode (blackout; hold; full on)
- 4 digit 7-segment LED display
- Charge status indicator
- For application areas such as: Wedding/gala/events; mobile use; mobile djs / entertainer; restaurants, bars and hotels
- Silent operation
- Application possibility: Standing; suspended

Package contents

Logistic

EAN / GTIN: 4026397746334

Weight: 1,85 kg Length: 1.57 m Width: 0.14 m Heigth: 0.12 m Bulky product - 1 x light effect, 1 x frost filter, 1 x stand, 1 x USB cable, 1 x user manual, 1 x declaration of conformity

Technical specifications:

Power supply:	100-240 V AC, 50/60 Hz	
	5V DC 1400 mA	
IP classification:	IP20	
Protection class:	Protection class III	
Power connection:	Mains input via USB C (W) mounting version power supply cord for USB A mains connection	
Battery pack type: 1 x lithium ion 7,4 V, 2600 mAh, 19,24		
Battery pack:	Battery operation up to 3,5h depending on program used	
	Recharging time 5h charging one battery	
LED lamp		
LED type:	32 x 0,25 W SMD 5050 3in1 TCL RGB	
Flash rate:	0,5 - 30 Hz	
Equipment:	Frost filter	
DMX channels:	annels: 4; 6; 10; 13; 19; 49	
DMX input:	tt: 1 x 3-pin XLR (M) mounting version	
DMX output: 1 x 3-pin XLR (F) mounting version		
Cooling:	Passive convection cooling	
Control:	Stand-alone; DMX; AirW; wireless remote control (not included); master/slave function; sound to light via microphone; QuickDMX via USB (optional)	
Projection:	Flicker-free	
Range:	AirW: range up to 70m with line-of-sight	
Carrier frequency:	2,4 GHz	
DMX fail mode:	Blackout; hold; full on	
Standing/fixation:	Stand	
Beam angle (1/2 peak):	gle (1/2 peak): 360°	
Housing color:	Transparent	
Attachment system:	nment system: 1x Ø 10mm	
splay type: 4 digit 7-segment LED display		
Display:	lay: Charge status indicator	
Status LED:	Charge status indicator; signal	
USB port: 1 x type C		
Diameter mounting holes:	nounting holes: 1 x Ø10mm	
Dimensions:	Length: 151 cm	
	Width: 5,3 cm	
	Depth: 6 cm Diameter: Ø 3,25 cm	
Weight:	1,08 kg	
Noise classification:	Class 0 (no noise at all)	
Legal specifications		
	Not designed for household room illumination	
Special product: Not designed for household room illumination		

Intended use:	Show effect lighting