


## EUROLITE LSD-18.25 MK2 (H)1,17m (W)1,17m

LED soft displays

Art. No.: 80503264

GTIN: 4026397459821

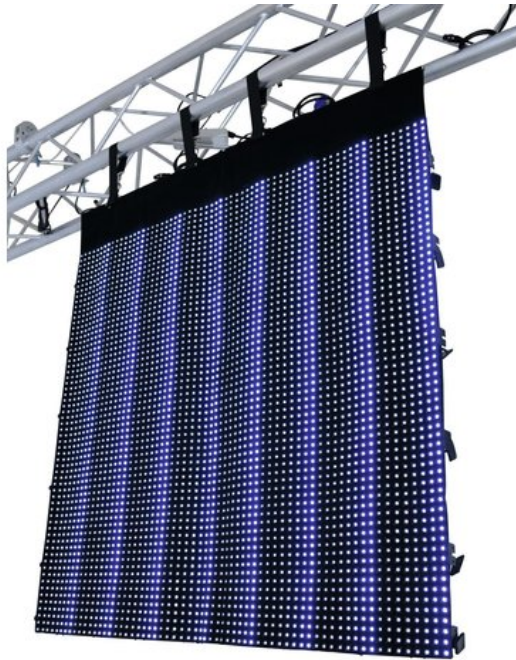

**The article is no longer in our assortment.**

### Features:

- Flexible displays with tricolor RGB LEDs (type SMD 5050) for bright and colorful projection of videos and graphics
- Improved version with even brighter LEDs and new angled connectors
- Modular display concept allows the build-up of large areas, ideal for outdoor use with large viewing distances
- Bendable and foldable PVC material suitable for various shapes, e.g. columns, circles, angles
- Fast and uncomplicated installation, indoor and outdoor (IP44)
- Truss suspension via built-in belts
- Water-repellent and flame-resistant
- Low weight and small volume for convenient transport
- Easy maintenance - LEDs can be replaced without difficulty
- Controllable via optional network components and PC software
- All-in-one control system T9 (80503301): network interface and software LED Show T9 - ideal system for mobile use with notebooks with 1-gigabit NIC
- Control system LED studio: receiver interface (80503311), PCI sending card and software LED Studio (80503130)
- Recommended media software: MADRIX
- Switch-mode power supply for operation between 100 and 240 volts
- Power output for passing on the power supply
- Available in different sizes and pixel pitches
- Custom sizes available upon request
- 4096 powerful LEDs SMD 5050 3in1 TCL RGB (homogenous color mix)

### Logistic

EAN / GTIN: 4026397459821

Weight: 19,20 kg

Length: 1.21 m

Width: 0.61 m

Height: 0.14 m

Bulky product

## Technical specifications:

Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	78,00 W
IP classification:	IP44
LED:	4096 x SMD 5050 3in1 TCL RGB (homogenous color mix)
Lamp life:	100000 h
Dimensions:	Width: 1,17 m Height: 1,17 m
Weight:	16,80 kg
Resolution (W x H):	64 x 64 pixels
Pixel pitch:	18.25 mm
Pixel density:	3002/m <sup>2</sup>
Pixel configuration:	tricolor RGB LEDs, type SMD 5050
Display port:	DVI/RJ45
Display mode:	synchronous to video source
Drive mode:	1/8 scan
Screen resolution:	max. 1280 x 1024 (LED Studio) max. 1024 x 896 (LED Show T9)
Brightness:	3680 cd/m <sup>2</sup> (nits)
Viewing angle:	110°
Frame rate:	60 Hz
Data refresh rate:	600 Hz
Colors:	16.7 million (R 256, G 256, B 256)
Operating temperature:	-10 to 45 °C
Humidity:	10 to 90 %
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting