


## EUROLITE DF-40 LED display 92x92

Ultra flat and flexible LED display

Réf. : 80503600

GTIN: 4026397423730

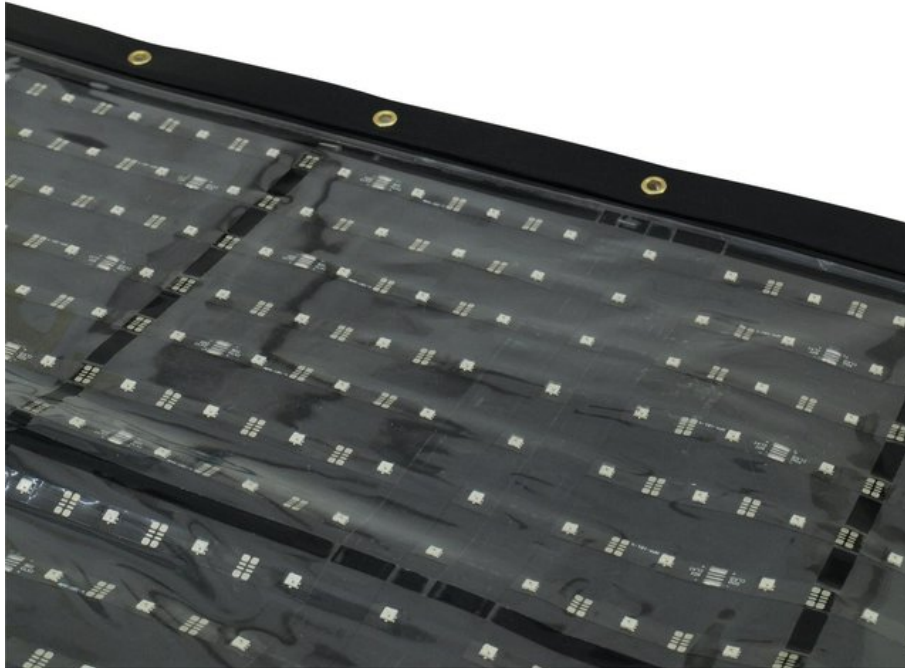

**L'article n'est plus disponible.**

### Caractéristiques:

- Ultraflat and flexible LED display for bright and colorful projection of videos and graphics
- Bends, rolls and moulds around almost any shape for waves, columns, circles, arcs and angles
- 4 millimeters thin and 800 grams light for convenient transport and simple installation
- 40 mm pixel pitch (seamless image at about 40 m)
- Applicable for installation in counters, columns and rear walls in shops and clubs, on fairs and various other environments
- Extendable for of large video billboards
- Control per network protocol in live mode with PC software or in stand-alone mode with media player (accessories)
- Control also possible per MADRIX, DMX and Artnet
- Large operating range from -20° to +50° C
- 484 LED puissantes SMD 3in1 TCL RGB (mélange de couleurs homogène)
- Commandé via DMX

### Logistique

EAN / GTIN: 4026397423730

Poids: 1,95 kg

Longueur: 1.00 m

Largeur: 0.12 m

Hauteur: 0.12 m

### Données techniques:

Puissance totale de raccordement:	40,00 W
LED:	484 x SMD 3in1 TCL RGB (mélange de couleurs homogène)
Commande:	DMX
Dimension:	Largeur : 92,5 cm Profondeur : 4 cm Hauteur : 92 cm

Poids:	600 g
Resolution:	22 x 22 pixels
Pixel pitch:	40 mm
Pixel configuration:	tricolor RGB LEDs
Display mode:	synchronous to PC, or asynchronous per media player
Brightness:	R 250-1000 mcd, G 500-1650 mcd, B 80-500 mcd
Viewing angle:	120°
Data refresh rate:	400 cycles/sec
Colors:	16.7 million (R 256, G 256, B 256)
Operating temperature:	-20° to 50°C
Dimensions (L x W x H):	925 x 920 x 4 mm
Spécifications juridiques	
Produit spécial:	Non destiné à l'éclairage de la pièce dans les ménages
Utilisation:	Éclairage pour effets de spectacle