

INTUCAB4VM100T

2-WAY FULLRANGE COLUMN ARRAY SPEAKER


SPEAKER LoZ

CONCEPT

The INTUCAB™ 4VM100T column array is a real full range speaker specifically designed for multimedia applications. It offers precise dispersion with tight vertical control to avoid unwanted reflections from ceilings and floors, but wide horizontal coverage. Custom-designed waveguide and phase plug parts allow this speaker to perfectly address the medium-throw requirements of seated audiences in class rooms, lecture rooms, chapels and board rooms. Mounting options include flying, vesa brackets, and flush wall mounting. Available in black and white structural paint finish.

FEATURES


- ▶ 4x4" LF drivers with phaseplug in closed cabinet
- ▶ 4x1" Silk dome tweeters in 5° down-facing wave guide
- ▶ Focused vertical and wide horizontal dispersion
- ▶ Advanced passive crossover for best sound quality
- ▶ Dual parallel Speakon-compatible connectors
- ▶ 5.0mm 4-pin terminal strip connector (2x2 parallel)
- ▶ 75mm VESA (rear) / 1xM10 (top) / 3xM6 mounting point
- ▶ Two slot mounting plates for flush wall installation
- ▶ 12mm MDF construction
- ▶ Structured scratch-resistant paint, black or white
- ▶ Rugged steel front grille with cosmetic rear-side foam
- ▶ CE/ROHS compliant

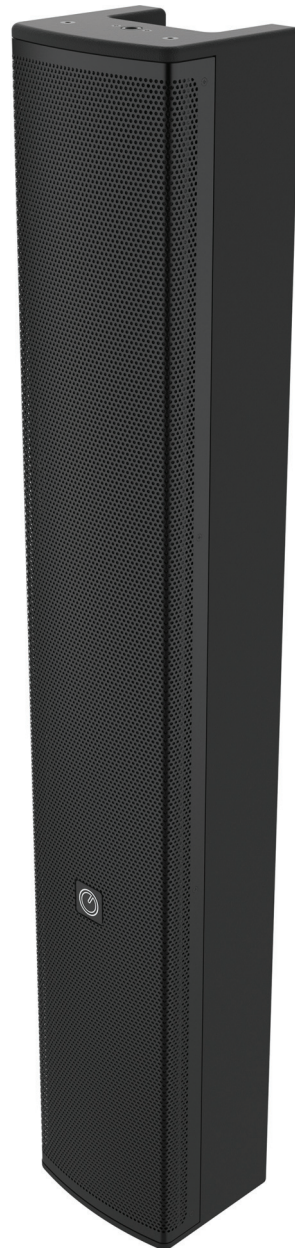

DETAILS



Connection Panel



Crossover

LOGISTICS DATA

Order Number (black).....	1305511
Single unit EAN-13 (black).....	5060502923509
Order Number (white).....	1305521
Single unit EAN-13 (white).....	5060502923516
Single Carton size WxDxH.....	1058x208x230mm
Single Carton gross weight.....	10.85 kg
Units per master carton.....	2
Master carton size WxDxH.....	1076x436x248mm
Master carton gross weight.....	22.8 kg

TECHNICAL DATA


Frequency response (-6 dB).....	90Hz-18kHz
Sensitivity (1W/1m) / Max SPL.....	90dB / 114dB
Dispersion HxV.....	120°x30°
Impedance.....	4Ω
Power Handling.....	140W (AES)
Drivers / Design.....	4x4" LF (closed) & 4x1" SD
Material.....	12mm MDF
Surface.....	Scratch-resistant paint
IP Rating.....	20
Dimensions WxDxH.....	160x140x1000mm
Weight.....	10.00 kg

SPEAKER LoZ


INTUCAB4VM100T

2-WAY FULLRANGE COLUMN ARRAY SPEAKER

FREQUENCY RESPONSE

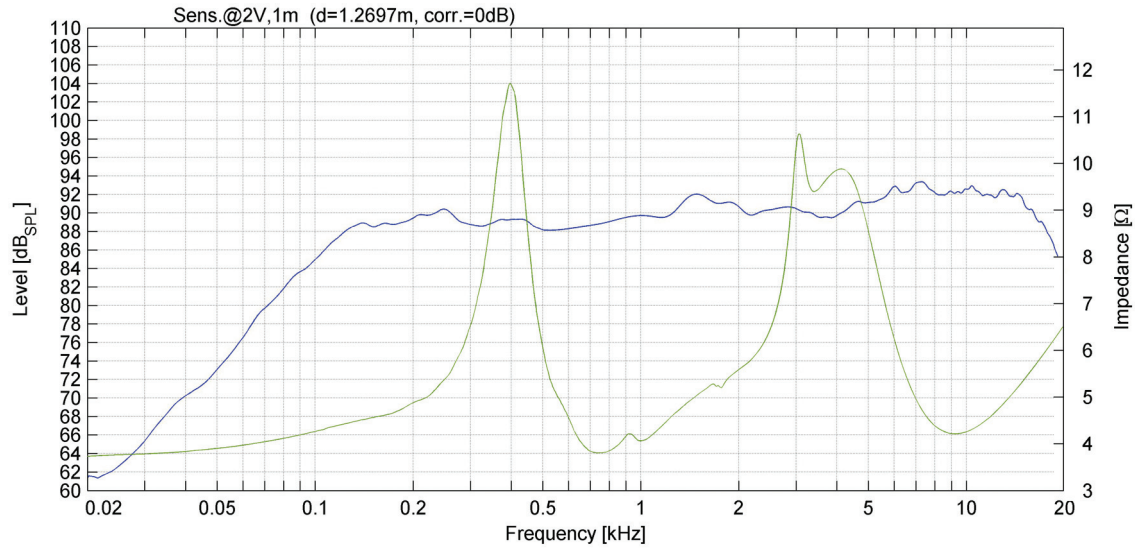


DIMENSIONS

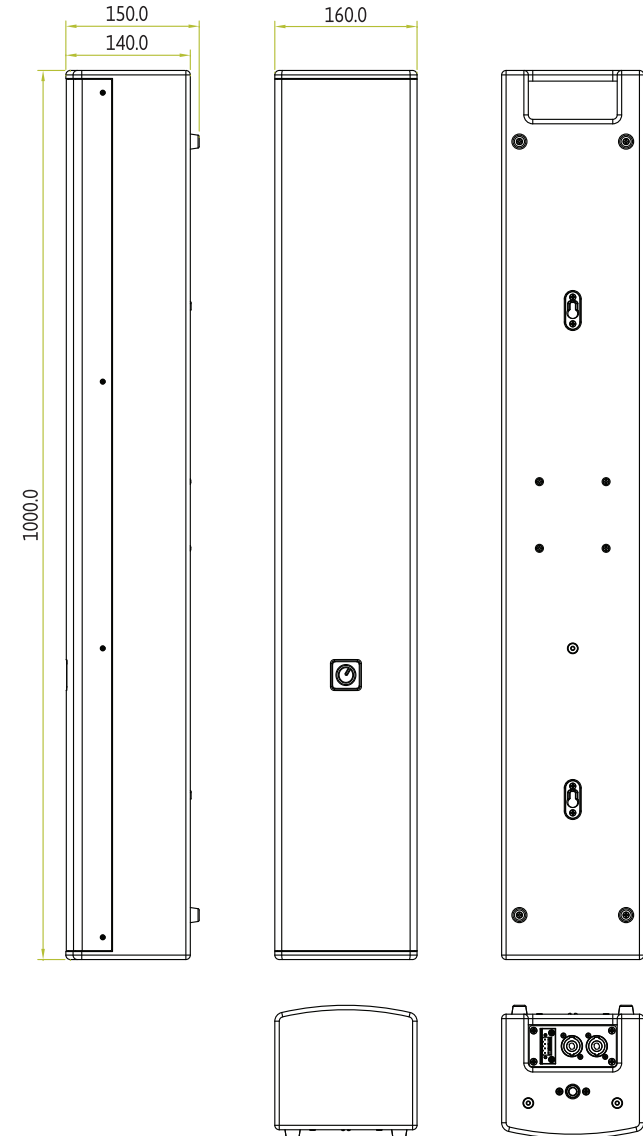

SPEAKER LoZ

DIRECTIVITY

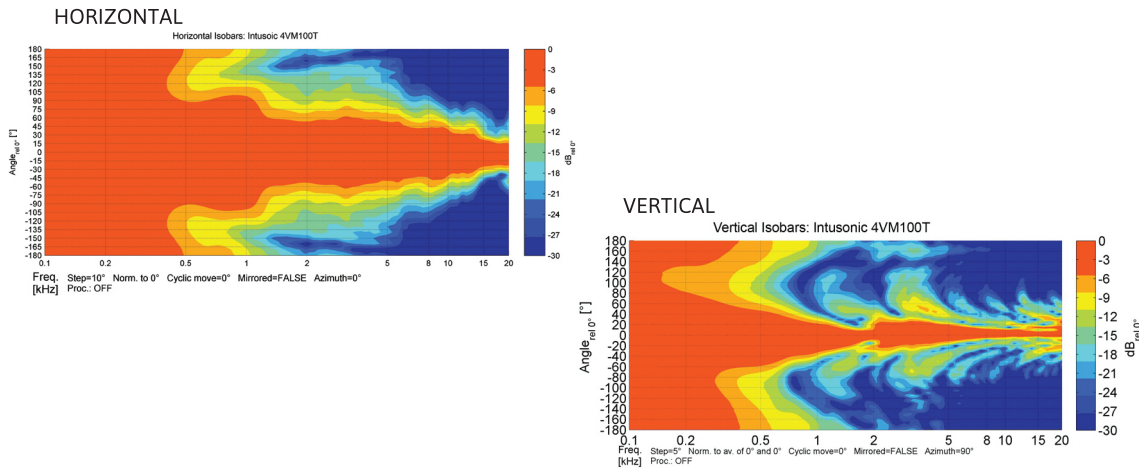

SPEAKER LoZ