

Product selected: BA 1200 SE NHR

BriteArc Single Ended Non Hot Restrike lamps are compact light sources with excellent performance, specially designed for a wide variety of audio-visual applications. The BriteArc lamps are filled with mercury and rare earth elements to obtain a high efficacy and a stable colour with a very good rendering index. They can be re-struck after 10 minutes. These lamps can be operated in any position.

Applications

- Show lighting
- Theatre
- Discotheque lighting
- Follow spots
- Effect lighting
- Architectural

Features

- High luminous efficacy
- Low infrared
- Colour stability
- Excellent lumen maintenance
- Physical ruggedness

Directions for use

- Burning position: universal
- Restrike after 10 minutes
- Only use in closed fixtures
- Can be operated on an electronic power supply or on a magnetic ballast

Product Attributes


Item description	BA 1200 SE NHR
Ordering Code	0023935
EAN code	5410288239354
Packing Quantity	10
Watt. (W)	1200
Volt. (V)	100
Cap	G22
Max. Over. Length (mm)	175
Diameter (mm)	40
Light output (lm)	110000
Current (A)	13.8
Average life (hours)	750
Repl. Time	1000
Colour Temp (K)	6000
CRI	1A
Arc Gap	10

Burning Position

Product Image



Line Drawing

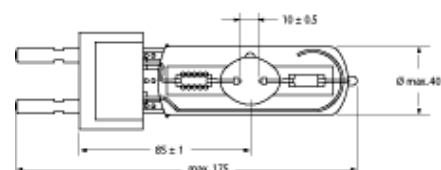

Lamp Cap

G22

